


survivor 50 classic surface

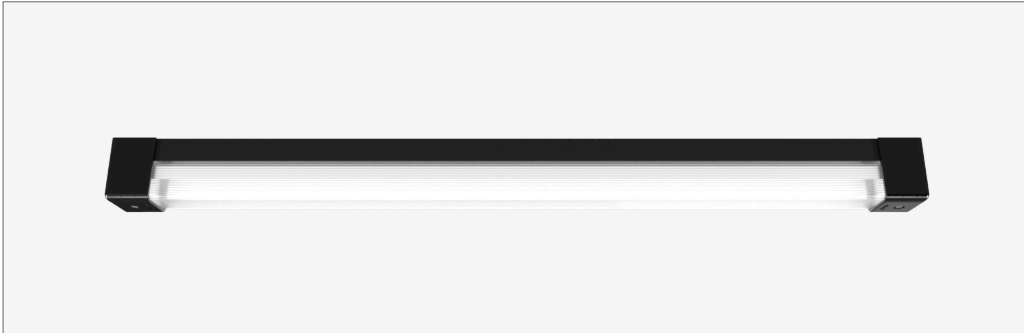

IK17 - 175 joules impact resistance

IP66 - hermetically sealed light module cassette

AT06 - security torx tamper-proof fasteners

description

Heavy-gauge extruded aluminium mounting base with durable polyester powder coat finish and impact-resistant GRP security caps

Impact-resistant UV-stabilised high-transmission polycarbonate light module diffuser

Serviceable replaceable and upgradable light module cassette

Internal socket drive security-torx 304 stainless steel security fasteners

Integral energy efficient Zhaga compliant Tridonic LED modules and power supply unit

Direct-fix surface mounted

Internal stainless steel wire safety lanyards

1.0 m circular flex connection

country of origin

Australia

accreditations

Australian Made and Owned

DALI alliance

EESS

RCM

warranty

7-year standard

10-year on application

applications

extremely robust surface mounted luminaire that enhances safety and security in the most challenging environments. a durable construction ensures dependable operation and superior performance under harsh operating conditions; ideal for applications such as transportation, custodial, public areas, and secure healthcare

standards

AS/NZS 60598.1:2017

AS/NZS 60598.2.1:2014

AS/NZS 60598.2.22:2019

AS/NZS 2293.3:2018

IEC/EN 62262:2002+A1:2021

AS 60529-2004

ANSI/IES LM-79-19

ANSI/IES LM-80-21

ANSI/IES TM-21-21

survivor 50 classic surface



options

finishes

black texture • white texture polyester powder coat
additional non-standard powder coat colours
35-year warranty powder coat on request

control system

DALI-2 • fixed output • Casambi wireless • switchDIM • 0-10 V

colour rendering index [CRI]

80+ • 90+

correlated colour temperature [CCT]

2700 K • 3000 K • 3500 K • 4000 K • 5000 K • 6500 K • tunable white

coloured LEDs

RGB • RGB+W • RGBW • RGBW+W • red • green • blue

electrical connection


IP68 quick-connect plug+socket • IP20 plug

sensors

type microwave • passive infrared
control system DALI-2 • Casambi wireless • basic on/off
detection mode presence • ambient light

emergency packs

type integrated
monitoring system DALI-2 • OEM proprietary
operating mode maintained • non-maintained • sustained

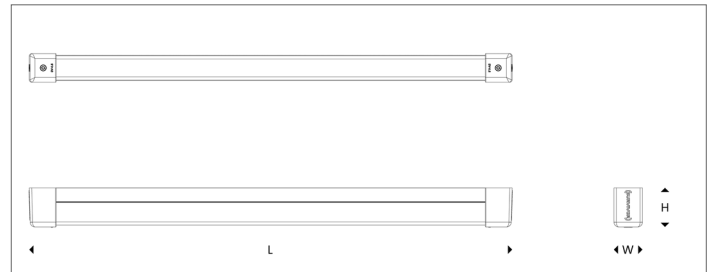

weights + dimensions [kg / mm]

nominal	L	W	H	weight
500	460	72	99	1.8
700	690	72	99	2.5
1000	970	72	99	3.4
1200	1250	72	99	4.3
1500	1530	72	99	5.2
1800	1810	72	99	6.2
2100	2090	72	99	7.7
2400	2370	72	99	8.8
2600	2650	72	99	9.5
2900	2930	72	99	10.6

integrated lighting systems

description

fully integrated and modular plug-n-play lighting systems for the most challenging and robust environments. every system is custom-manufactured in Australia using high-quality materials. supplied in pre-fabricated sections with pre-wired light module cassettes, and interconnecting IP68 quick-connect leads; making installation and maintenance effortless. available with multiple circuits, control systems, light sources, finishes, sensors, and emergency packs

sensors

type microwave • passive infrared
control system DALI-2 • Casambi wireless • basic on/off
detection mode presence • ambient light

emergency packs

type integrated
monitoring system DALI-2 • OEM proprietary
operating mode maintained • non-maintained • sustained

survivor 50 classic **surface**



CRI 80+ | CCT 3000 K | **830**

nominal length	20%		40%		60%		80%		100%	
	lumens	watts	lumens	watts	lumens	watts	lumens	watts	lumens	watts
500	270	2.5	540	5	800	7.5	1070	10	1340	12.5
700	540	5	1070	10	1600	15	2140	20	2670	25
1000	800	7.5	1600	15	2410	22.5	3210	30	4010	37.5
1200	1070	10	2140	20	3210	30	4280	40	5350	50
1500	1340	12.5	2670	25	4010	37.4	5350	49.9	6680	62.4
1800	1600	15	3210	30	4810	44.9	6420	59.9	8020	74.9
2000	1870	17.5	3740	35	5610	52.5	7490	70	9360	87.5
2400	2140	20	4280	40	6420	60	8560	80	10690	100
2600	2410	22.5	4810	45	7220	67.5	9630	90	12030	112.5
2900	2670	25	5350	50	8020	75	10700	100	13370	125

CRI 80+ | CCT 4000 K | **840**

nominal length	20%		40%		60%		80%		100%	
	lumens	watts	lumens	watts	lumens	watts	lumens	watts	lumens	watts
500	280	2.5	560	5	840	7.5	1120	10	1400	12.5
700	560	5	1120	10	1680	15	2240	20	2800	25
1000	840	7.5	1680	15	2520	22.5	3350	30	4190	37.5
1200	1120	10	2240	20	3360	30	4480	40	5600	50
1500	1400	12.5	2800	25	4200	37.4	5590	49.9	6990	62.4
1800	1680	15	3360	30	5040	44.9	6710	59.9	8390	74.9
2000	1960	17.5	3920	35	5870	52.5	7830	70	9790	87.5
2400	2240	20	4470	40	6710	60	8950	80	11180	100
2600	2520	22.5	5030	45	7550	67.5	10060	90	12580	112.5
2900	2800	25	5590	50	8380	75	11180	100	13970	125

photometric data is nominal and intended for general information purposes only. it is not to be relied upon nor used in place of photometry files issued by Survivor Lighting Pty Ltd
± 5% measurement uncertainty

